

Model: MJ3067 PE Adaptor

- Suitable for all kinds of pipe material
- Suitable for water and gas
- Ductile cast iron GGG45 body and clamping ring(s), acc. to EN-GJS-450-10
- RESICOAT® epoxy powder coating, according to GSK standards and EN 14901
- NBR gasket, acc. to EN 682 and AS4020 (-5°C up to +50°C)
 - EPDM gasket acc. to EN 681-1 (0°C up to +50°C) by request
- Angular deflection of max. 8° per socket at installation (based on the middle of the range)
- Stainless steel A4 quality (AISI 316) Uni/Fiksers
- Stainless steel A4 quality (AISI 316) bolts, nuts and washers standard or A2 quality (AISI 304) by request
- Hygiene protection included DN50 - DN1025
- PE: PE100 SDR11

Installation instruction:

- Read the user manual
- For restraint versions, on plastic pipes, the use of an insert stiffener (see accessories) is mandatory, check our technical information


Note:

ID min. = minimum insertion depth

Reece Code	+GF+ WAGA NBR/A4	DN (mm)	Range 1 (mm)	PE outlet (mm)	a (mm)	b (mm)	c (mm)	ID min. (mm)	e (mm)	PN Water (bar)	MOP Gas (bar)	Weight (kg)
1026864	709365009	50	46 - 71	50	615 - 637	170	470	84	3xM12	16	8	3.400
1026865	709365010	50	46 - 71	63	615 - 637	170	470	84	3xM12	16	8	3.700
1026866	709365011	65	63 - 90	63	621 - 644	191	468	84	3xM12	16	8	4.700
1026867	709365012	65	63 - 90	75	621 - 644	191	468	84	3xM12	16	8	4.900
1026868	709365014	80	84 - 105	90	622 - 644	210	463	84	3xM12	16	8	6.000
1026746	709365015	80	84 - 105	110	622 - 644	210	463	84	3xM12	16	8	6.500
1026869	709465016	100	104 - 132	90	624 - 650	241	452	90	3xM16	16	8	6.900
1026870	709365016	100	104 - 132	110	624 - 650	241	461	90	3xM16	16	8	7.900
1026871	709465017	100	104 - 132	125	628 - 654	241	451	90	3xM16	16	8	8.800
1026872	709465018	125	132 - 155	110	637 - 660	270	452	90	4xM16	16	8	10.700
1026873	709365018	125	132 - 155	125	637 - 660	270	452	90	4xM16	16	8	11.000
1026874	709465019	125	132 - 155	140	635 - 658	270	450	90	4xM16	16	8	11.400
1026875	709465021	125	132 - 155	160	507 - 530	270	321	90	4xM16	16	8	14.200
1026876	709365020	150	154 - 192	160	657 - 694	312	445	110	4xM16	16	8	15.900
1026877	709465020	150	154 - 192	180	655 - 692	312	438	110	4xM16	16	8	17.000
1026878	709365024	200	192 - 232	200	671 - 708	371	434	110	6xM16	16	8	22.500
1026879	709465024	200	192 - 232	225	671 - 708	371	431	110	6xM16	16	8	27.100
3714229	709365025	225	230 - 268	250	692 - 730	415	420	125	6xM20	16	8	36.600
1026880	709365028	250	267 - 310	250	720 - 763	445	420	130	6xM20	16	8	40.500
1026881	709465028	250	267 - 310	280	716 - 759	445	417	130	6xM20	16	8	43.000
1026882	709365032	300	315 - 356	315	747 - 785	495	410	130	8xM20	16	8	58.400

Certifications:

AS4020 - NBR & EPDM drinking water contact approved
 WSAA – PA 1428
 EN 14525:2022

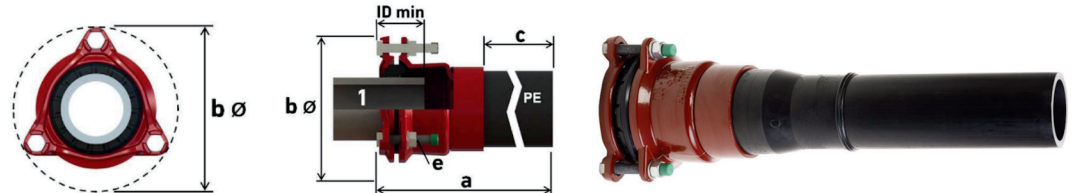

Available at Reece. Call 1800 032 566 or visit reece.com.au/storefinder for your nearest store

Disclaimer:
 All Reece trademarks and logos are owned by Reece Group Pty Ltd. All other brand or product names are trademarks or registered marks of their respective owners and displayed by agreement. Because we are continuously improving our products and services, Reece reserves the right to change specifications without prior notice.

Water & Gas..... WAGA
One size fits and grips all