

**Model: MJ3207 End Cap Threaded**

- Suitable for all kinds of pipe material
- Suitable for water and gas
- Ductile cast iron GGG45 body and clamping ring(s), acc. to EN-GJS-450-10
- RESICOAT® epoxy powder coating, according to GSK standards and EN 14901
- NBR gasket, acc. to EN 682 and AS4020 (-5°C up to +50°C)
  - EPDM gasket acc. to EN 681-1 (0°C up to +50°C) by request
- Angular deflection of max. 8° per socket at installation (based on the middle of the range)
- Stainless steel A4 quality (AISI 316) Uni/Fiksers
- Stainless steel A4 quality (AISI 316) bolts, nuts and washers standard or A2 quality (AISI 304) by request
- Hygiene protection included DN50 - DN1025
- Threaded outlet 3/4- 2 inch

**Installation instruction:**


- Read the user manual
- For restraint versions, on plastic pipes, the use of an insert stiffener (see accessories) is mandatory, check our technical information
- \* DN350 & DN400 for plastic pipe materials = PN 10 bar water / MOP 5 bar gas

**Note:**

ID min. = minimum insertion depth

Reece Code	+GF+ WAGA NBR/A4	DN (mm)	Thread Type	Size (inch)	Range 1 (mm)	a (mm)	b (mm)	ID min. (mm)	e (mm)	PN Water (bar)	MOP Gas (bar)	Weight (kg)
1026933	709385004	50	BSP	3/4	46 - 71	125 - 147	170	84	3xM12	16	8	3.100
1026934	709385005	50	BSP	1	46 - 71	125 - 147	170	84	3xM12	16	8	3.100
1026935	709385006	50	BSP	1.25	46 - 71	125 - 147	170	84	3xM12	16	8	3.100
1026936	709385007	50	BSP	1.5	46 - 71	125 - 147	170	84	3xM12	16	8	3.100
1026937	709385008	50	BSP	2	46 - 71	125 - 147	170	84	3xM12	16	8	3.100
1026938	709385009	65	BSP	3/4	63 - 90	133 - 156	191	84	3xM12	16	8	4.800
1026939	709385010	65	BSP	1	63 - 90	133 - 156	191	84	3xM12	16	8	4.800
1026940	709385011	65	BSP	1.25	63 - 90	133 - 156	191	84	3xM12	16	8	4.800
1026941	709385012	65	BSP	1.5	63 - 90	133 - 156	191	84	3xM12	16	8	4.800
1026942	709385013	65	BSP	2	63 - 90	133 - 156	191	84	3xM12	16	8	4.400
1026943	709385014	80	BSP	3/4	84 - 105	135 - 157	210	84	3xM12	16	8	6.500
1026944	709385015	80	BSP	1	84 - 105	135 - 157	210	84	3xM12	16	8	6.500
1026945	709385016	80	BSP	1.25	84 - 105	135 - 157	210	84	3xM12	16	8	6.500
1026946	709385017	80	BSP	1.5	84 - 105	135 - 157	210	84	3xM12	16	8	6.500
1026947	709385018	80	BSP	2	84 - 105	135 - 157	210	84	3xM12	16	8	5.200
1026948	709385019	100	BSP	3/4	104 - 132	143 - 169	241	90	3xM16	16	8	8.000
1026949	709385020	100	BSP	1	104 - 132	143 - 169	241	90	3xM16	16	8	8.000
1026950	709385021	100	BSP	1.25	104 - 132	143 - 169	241	90	3xM16	16	8	8.000
1026951	709385022	100	BSP	1.5	104 - 132	143 - 169	241	90	3xM16	16	8	8.000
1026952	709385023	100	BSP	2	104 - 132	143 - 169	241	90	3xM16	16	8	8.000
1026953	709385024	125	BSP	3/4	132 - 155	149 - 172	270	90	4xM16	16	8	7.900
1026954	709385025	125	BSP	1	132 - 155	149 - 172	270	90	4xM16	16	8	7.900
1026955	709385026	125	BSP	1.25	132 - 155	149 - 172	270	90	4xM16	16	8	7.900
1026956	709385027	125	BSP	1.5	132 - 155	149 - 172	270	90	4xM16	16	8	7.900
1026957	709385028	125	BSP	2	132 - 155	149 - 172	270	90	4xM16	16	8	7.900
1026958	709385029	150	BSP	3/4	154 - 192	169 - 206	312	110	4xM16	16	8	10.700
1026959	709385030	150	BSP	1	154 - 192	169 - 206	312	110	4xM16	16	8	10.700
1026960	709385031	150	BSP	1.25	154 - 192	169 - 206	312	110	4xM16	16	8	10.700
1026961	709385032	150	BSP	1.5	154 - 192	169 - 206	312	110	4xM16	16	8	10.700
1026962	709385033	150	BSP	2	154 - 192	169 - 206	312	110	4xM16	16	8	10.700

Continued over page.....

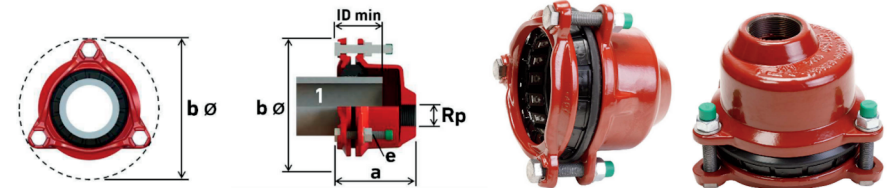

Available at Reece. Call 1800 032 566 or visit [reece.com.au/storefinder](http://reece.com.au/storefinder) for your nearest store

Disclaimer:  
 All Reece trademarks and logos are owned by Reece Group Pty Ltd. All other brand or product names are trademarks or registered marks of their respective owners and displayed by agreement. Because we are continuously improving our products and services, Reece reserves the right to change specifications without prior notice.

**Water & Gas..... WAGA**  
**One size fits and grips all**

**Model: MJ3207 End Cap Threaded**

.....Continued

- Suitable for all kinds of pipe material
- Suitable for water and gas
- Ductile cast iron GGG45 body and clamping ring(s), acc. to EN-GJS-450-10
- RESICOAT® epoxy powder coating, according to GSK standards and EN 14901
- NBR gasket, acc. to EN 682 and AS4020 (-5°C up to +50°C)
  - EPDM gasket acc. to EN 681-1 (0°C up to +50°C) by request
- Angular deflection of max. 8° per socket at installation (based on the middle of the range)
- Stainless steel A4 quality (AISI 316) Uni/Fiksers
- Stainless steel A4 quality (AISI 316) bolts, nuts and washers standard or A2 quality (AISI 304) by request
- Hygiene protection included DN50 - DN1025
- Threaded outlet 3/4- 2 inch

**Installation instruction:**

- Read the user manual
- For restraint versions, on plastic pipes, the use of an insert stiffener (see accessories) is mandatory, check our technical information
- \* DN350 & DN400 for plastic pipe materials = PN 10 bar water / MOP 5 bar gas


**Note:**

ID min. = minimum insertion depth

Reece Code	+GF+ WAGA NBR/A4	DN (mm)	Thread Type	Size (inch)	Range 1 (mm)	a (mm)	b (mm)	ID min. (mm)	e (mm)	PN Water (bar)	MOP Gas (bar)	Weight (kg)
1026963	709385034	200	BSP	3/4	192 - 232	183 - 220	371	110	6xM16	16	8	16.800
1026964	709385035	200	BSP	1	192 - 232	183 - 220	371	110	6xM16	16	8	16.800
1026965	709385036	200	BSP	1.25	192 - 232	183 - 220	371	110	6xM16	16	8	16.800
1026966	709385037	200	BSP	1.5	192 - 232	183 - 220	371	110	6xM16	16	8	16.800
1026967	709385038	200	BSP	2	192 - 232	183 - 220	371	110	6xM16	16	8	17.500
1026968	709385049	225	BSP	3/4	230 - 268	216 - 254	415	125	6xM20	16	8	27.100
1026969	709385050	225	BSP	1	230 - 268	216 - 254	415	125	6xM20	16	8	27.100
1026970	709385051	225	BSP	1.25	230 - 268	216 - 254	415	125	6xM20	16	8	27.100
1026971	709385052	225	BSP	1.5	230 - 268	216 - 254	415	125	6xM20	16	8	27.100
1026972	709385053	225	BSP	2	230 - 268	216 - 254	415	125	6xM20	16	8	25.700
1026973	709385039	250	BSP	3/4	267 - 310	225 - 268	445	130	6xM20	16	8	37.600
1026974	709385040	250	BSP	1	267 - 310	225 - 268	445	130	6xM20	16	8	37.600
1026975	709385041	250	BSP	1.25	267 - 310	225 - 268	445	130	6xM20	16	8	37.600
1026976	709385042	250	BSP	1.5	267 - 310	225 - 268	445	130	6xM20	16	8	37.600
1026977	709385043	250	BSP	2	267 - 310	225 - 268	445	130	6xM20	16	8	27.700
1026978	709385044	300	BSP	3/4	315 - 356	238 - 276	495	130	8xM20	16	8	47.700
1026979	709385045	300	BSP	1	315 - 356	238 - 276	495	130	8xM20	16	8	47.700
1026980	709385046	300	BSP	1.25	315 - 356	238 - 276	495	130	8xM20	16	8	47.700
1026981	709385047	300	BSP	1.5	315 - 356	238 - 276	495	130	8xM20	16	8	47.700
1026982	709385048	300	BSP	2	315 - 356	238 - 276	495	130	8xM20	16	8	34.100
1026983	709385054	400	BSP	3/4	392 - 433	261 - 303	580	135	10xM20	16*	8*	45.100
1026984	709385055	400	BSP	1	392 - 433	261 - 303	580	135	10xM20	16*	8*	45.100
1026985	709385056	400	BSP	1.25	392 - 433	261 - 303	580	135	10xM20	16*	8*	45.100
1026986	709385057	400	BSP	1.5	392 - 433	261 - 303	580	135	10xM20	16*	8*	45.100
1026987	709385058	400	BSP	2	392 - 433	261 - 303	580	135	10xM20	16*	8*	45.100

**Certifications:**

AS4020 - NBR & EPDM drinking water contact approved  
 WSAA – PA 1428  
 EN 14525:2022

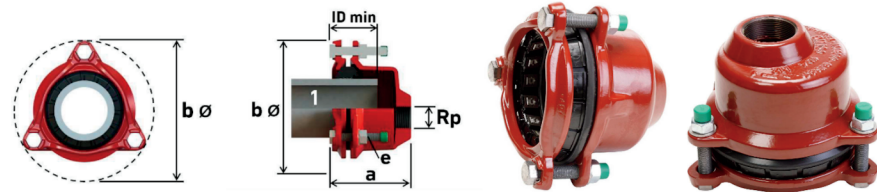

Available at Reece. Call 1800 032 566 or visit [reece.com.au/storefinder](http://reece.com.au/storefinder) for your nearest store

Disclaimer:  
 All Reece trademarks and logos are owned by Reece Group Pty Ltd. All other brand or product names are trademarks or registered marks of their respective owners and displayed by agreement. Because we are continuously improving our products and services, Reece reserves the right to change specifications without prior notice.

**Water & Gas..... WAGA**  
**One size fits and grips all**